

Easy install mounting profile




# Roller blind QS82

## Product information

One of the most remarkable features of the cassette system is the low-noise chain control. Additionally the operation is very smooth and easy due to the perfectly balanced lift assist springs. This blind also has versatility built in with optional guide wires or side channels.

Please refer to [www.kvadratverosol.nl](http://www.kvadratverosol.nl) for the full range of roller blind types and shapes.


## System drawings

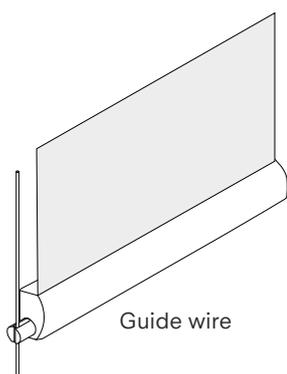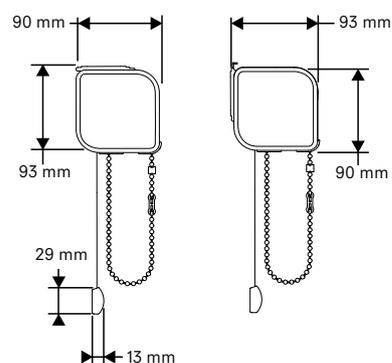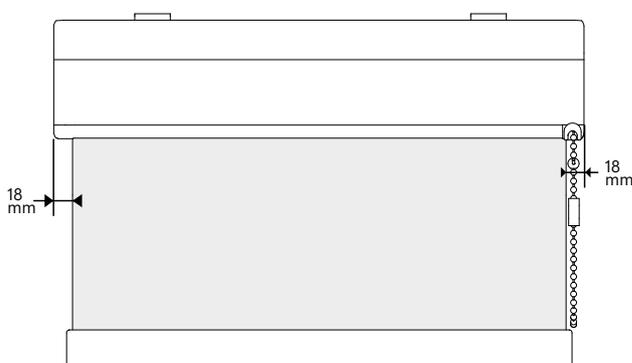



Guide wire



Window sill fix



Face fix

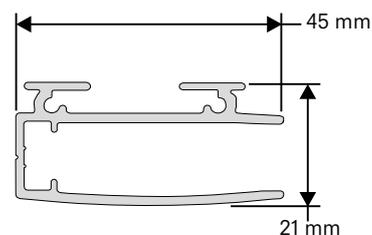

Channels

**kvadrat verosol**

## Technical information

<b>Product code</b>		QS82.0
<b>Product name</b>		Roller blind cassette
<b>Operation</b>		Chain operation
<b>Tube</b>	Material	Extruded aluminium Ø 44 mm, 49 mm, 57 mm
	Width	400 mm min - 2800 mm max (depending on tube and fabric)
<b>Dimensions</b>	Drop*	300 mm min - 4000 mm max (depending on tube and fabric)
	Maximum area	8 m <sup>2</sup>
<b>Cassette</b>	Material	Extruded Aluminium Alloy - asymmetric Profile
	Dimensions	90 mm W x 93 mm H
<b>Bottom rail</b>	Material	Extruded Aluminium Alloy - asymmetric Profile
	Dimensions	13 mm W x 29 mm H
	Colours	Powder coated RAL 9001, 9005, 9010, 9016 or clear anodised
<b>End caps</b>	Material	UV stabilised PA
	Colours	Grey, White, Black, coordinated to rail colour
<b>Bead chain</b>	Material	Nickel plated brass or stainless steel
<b>Installation brackets</b>	Material	Press formed Steel
	Application	Top or face fixing - concealed when installed

## Motorised

Product code		QS82.4	QS82.5
<b>Product name</b>		Roller blind cassette	Roller blind cassette
<b>Operation</b>		24V DC Motor or 230V AC motor	12 V DC battery motor
	Width	600 mm min - 2800 mm max	700 mm min - 2800 mm max
<b>Dimensions</b>	Drop*	300 mm min - 4000 mm max	300 mm min - 4000 mm max
	Maximum area	9 m <sup>2</sup>	9 m <sup>2</sup>

## Optional

<b>Guide Wire</b>	Cable	Steel
	Bracket	Nickel plated steel
<b>Guiding Channels</b>	Material	Extruded aluminium alloy U profile
	Colours	Powder coated RAL 9001, 9005, 9010, 9016 or clear anodised
	Dimensions	45 mm W x 21 mm H

\* Maximum drop depending on fabric thickness. Please refer to [www.kvadratverosol.nl](http://www.kvadratverosol.nl) for more information.

Disclaimer: Subject to misprints, errors and technical modifications.  
Please contact [projecten@verosol.nl](mailto:projecten@verosol.nl) to check or for questions regarding other measurements.